


Profiles for external thermal insulation composite systems "ETICS"





APU Movable Joint Profile DUO-TEX

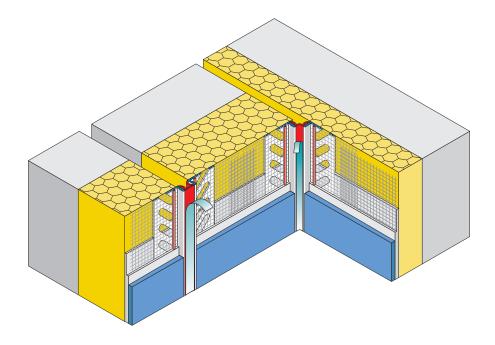



The Movable Joint Profile consists of two plastic profiles with an extruded flexible **TPE Movement Strip**. On both sides of the profile, there are fabric parts welded on by UV method. The Movement Strip is covered with an adhesive Protective Film, which is simply pulled off after the plastering/painting work, so, a neat transition is formed. Due to the flexible Movement Strip, the profile can be used on even surfaces as well as in inner/outer corners.

The profile is set with fixing mortar (construction adhesive) onto the insulation board or into the stud wall joint. The length can be trimmed with shears.





Available packed unit:

25 bars of 2.00 m = 50.00 m

For detailed information see technical information sheet or visit us on the Internet at www.apu.ch.




W50/F34/HF-KT/01.17 subject to changes without notice


APU Movable Joint Profile DUO-TEX W50


Additional advantages


- · neat plaster boder
- flushed edges
- · easy to process
- enhanced plaster grip due to the grooved profile




Application examples







Application for inner corners



Application for drywalls

Profile in type A50 (without fabric parts, other examples can be found on our website www.apu.ch)

Connecting profiles

Alingn the following profiles with a butt joint close together. Underlay with a piece of PUR or butyl sealing tape in the contact area behind 2 profiles. The ability to move must not be affected.

