



Profiles for external thermal insulation composite systems "ETICS"

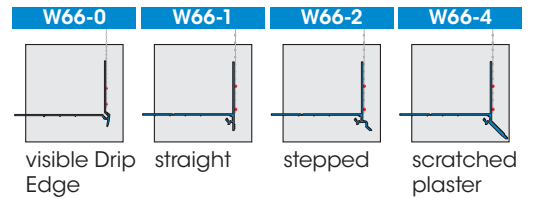

APU Base Edge Profiles SOKA-TEX
for all insulation thicknesses in the base area

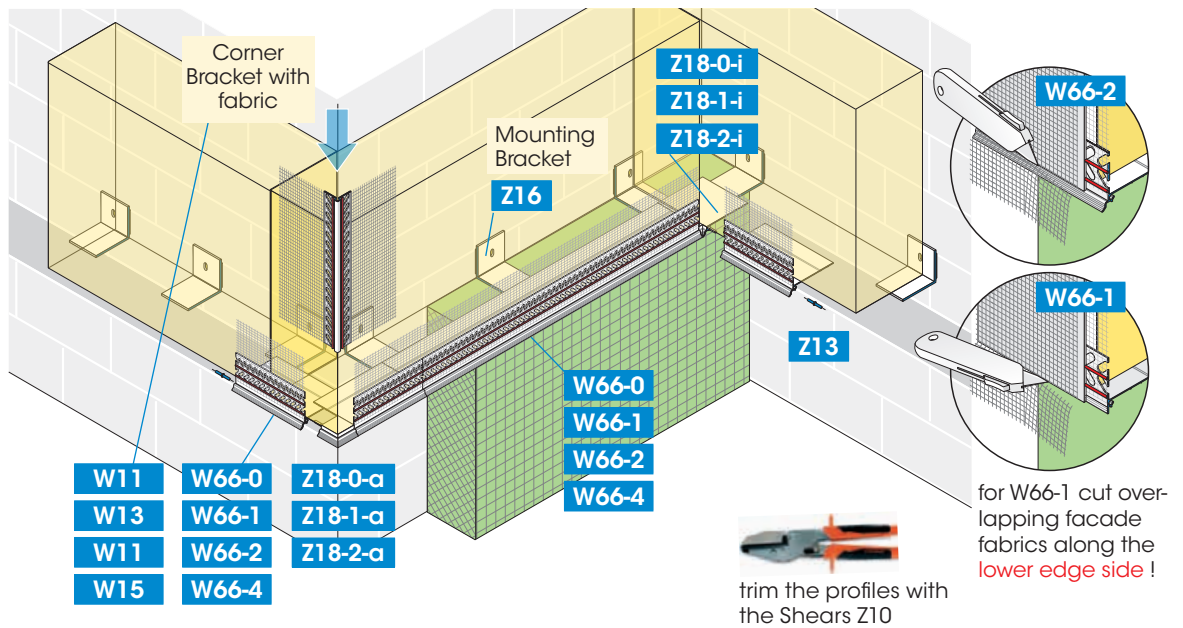

The plastic Base Edge Profiles SOKA-TEX are extended border profiles with Drip Edge and Plug Connectors.

They are used if a perimeter insulation is present and the wall insulation is mounted afterwards. The profile is slid between both insulation plates.

If the base insulation is retrofitted, the wall insulation board must be mounted on the self-adhesive plastic Mounting Brackets Z16 (2 pieces per running meter). Brackets are available with suitable lengths for the different insulation thicknesses. The flush aligned contact joints of the profiles is made with the enclosed Plug Connectors Z13.

To make crack-proof corners, the profiles are joined with prefabricated Corner Elements Z18-0-i/-a, Z18-1-i/-a or Z18-2-i/-a (for inner/outer corners) - depending on the Edge Profile shape being used. In the corner formation using a Corner Bracket with fabric (W11, W13, W15), the fabric parts of the Corner Bracket and Base Edge Profiles overlap each other.

Available packed unit:

W66-0 to -4: 25 bars of 2.00 m = 50.00 m incl.
25 pieces Plug Connectors + 4 outer and 2 inner Corner Elements (no Corner Elements available for W66-4)

For detailed information see technical information sheet or visit us on the Internet at www.apu.ch.

